

EMC-3D FDI Panel Datasheet


Product Information
Product Dimensions




EMC-3D FDI Panel

Product Description


- Easy installation.
- Fully integrated.
- Aesthetic IP65 enclosure.
- Adjustable sounder volume.
- Battery back-up as standard.
- Ultra bright LED illumination.
- Audible warning of low battery.
- Mains fail operation / signalling.
- Combined audio / visual warning.
- 2 separate change over relay outputs.
- Standard operation audio visual delay then close.
- Part close operation. (smoke curtain - 1 or 2 stage closing).
- Can be used with fire door motors, tube motors or other controls.
- All functions easily adjustable with DIL switches and / or potentiometers.
- 2 separate fire signal circuits to suit volt free or 24VDC alarm signals (Local / Remote).
- Audio / Visual 'Slave' panel also available.

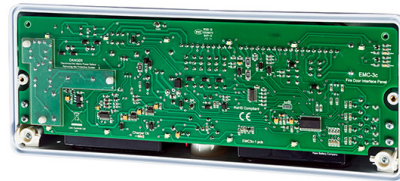

General Arrangement

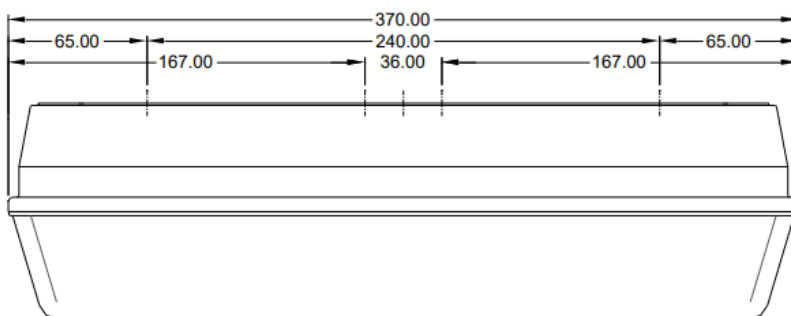

Operating Principle

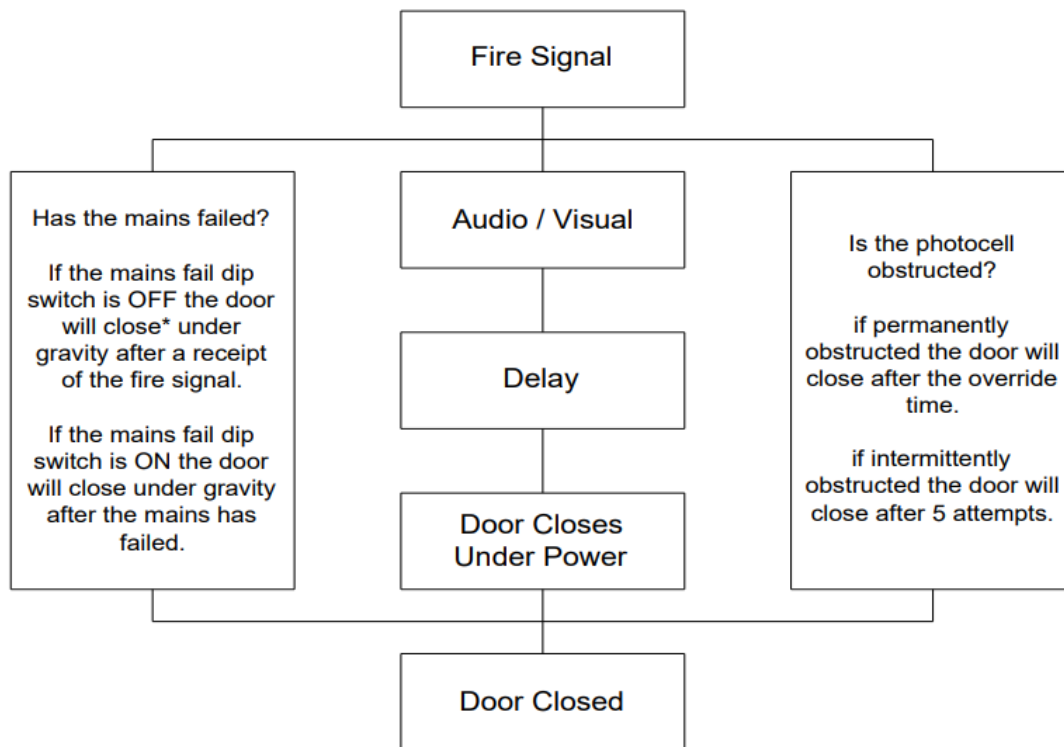

*Closure under mains fail conditions takes place after the audio / visual delay.

Please Contact Our Sales Department On 01928 579050 For Further Information

