

STA Datasheet

Product Information
Product Data
Product Dimensions



STA Sectional Door Operators



Product Features


The STA sectional overhead door operator has a 0.55kW, 400V three phase motor. Alternatively, a 0.3kW, 240V single phase version is available. These models are available with hand crank, floor level hand chain, high level hand chain or disengage mechanism systems, which enable the door to be manually opened & closed when required. Available with digital or mechanical limits. Pre-wired to a basic built on starter or CS series multi-function control panels. Developed to make installation easy and simple. Electronic Limits available on request.

Operator Specification	400V 3 Phase Operators	230V 1 Phase Operators
Torque (Nm)	100 (140 Peak)	70
Power (Kw)	0.55	0.3
Output Speed (rpm)	24	24
Hollowbore Diameter (mm)	25.4	25.4
Voltage/ Phase	400/3	230/1
Current (amps)	1.8	4.7
Frequency (Hz)	50	50
Limit Turns	22	22
Protection (IP)	54	54

Please Contact Our Sales Department On 01928 579050 For Further Information


Product Dimensions - STA c/w Floor Level Hand Chain Mechanism

Note: Vertical Mount Option Only Available.

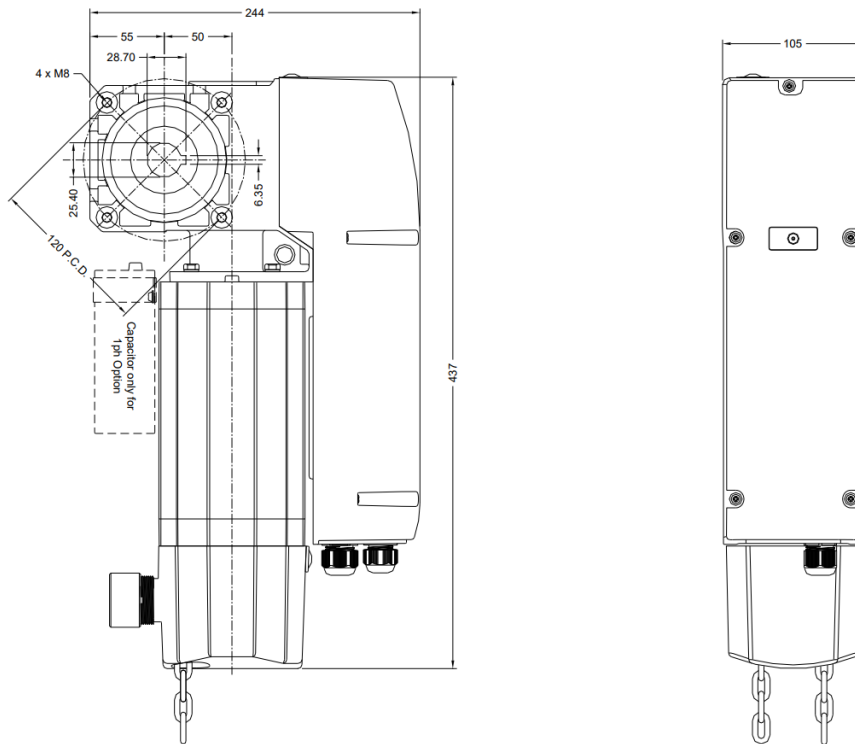

Product Dimensions - STA c/w High Level Hand Chain

Note: Horizontal Mount Option Only Available.

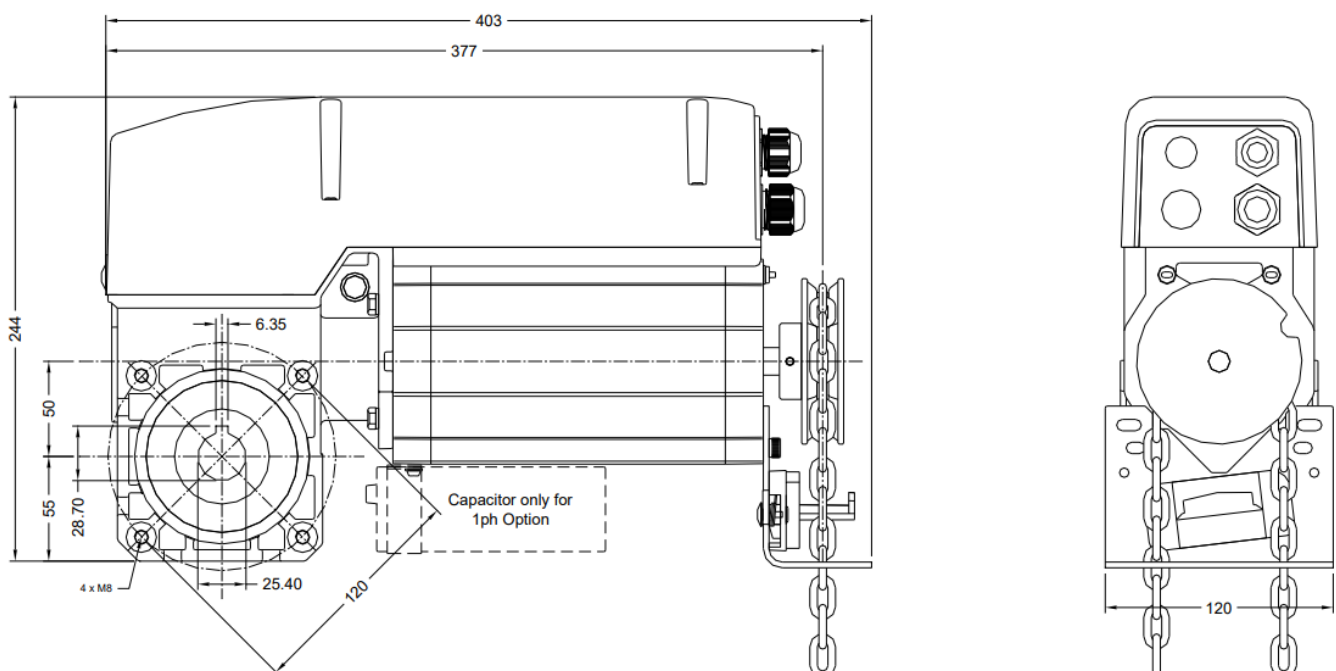

Product Dimensions - STA c/w Disengage Mechanism

Note: Vertical or Horizontal Mount Option Available.

