mares

maveo connect stick

For a good feeling. Anytime, everywhere.

Your customers want more comfort from their garage door or outdoor gate. It should be smart and easy to operate, offer high security and not cost a fortune.

And you make more sales. Without any great expense or effort for you or your company, because installation and setup is such child's play that your customers can do it themselves.

Impossible, you say?

But that's just what the **maveo connect stick** offers. It's the perfect accessory. Your customers get worldwide control of their garage door, revolving or sliding gate.¹ Thanks to the status display in the maveo app, and the ability to control the door or gate while away, your customers **have a handle on everything** and always have **a great feeling**.

The maveo connect stick features easy **plug-&-play** installation: Just insert the maveo connect stick into the marantec opener and download the maveo app. Register, connect, and they're done. All that's necessary is a good Internet connection in the garage, a smartphone and a "my maveo" account.

Features at a glance

- **Worldwide control:** Access from everywhere, including door or gate status. (open/closed)
- O Notifications: Information each time the door or gate moves.
- **O** Access management: Granting or revoking digital access keys to family, friends, neighbors and craftmen.
- **C** Self-closing: The door closes automatically after a defined time. ² (1/5/15 minutes)
- **O** Ventilation position: Discourages mold formation in the garage.³
- **Geofencing**: Opens even faster as soon as the user arrives home. Opens after simple confirmation. (Functional radius 250 meters)
- **C** Light on and off: The light on the drive can be controlled from the app.
- C Live-Status: An animation in the app shows the door movement.

Technical data

- Technical requirements: Internet reception on the drive Smartphone: We recommend a smartphone with Android 9 or newer or an iPhone model 8/SE or newer with iOS 16 or later
- Bluetooth: 4.2
- WLAN: 2,4 GHz
- Dimensions: 28 x 13 x 66 mm
- IP protection class: 20
- Temperature: -20°C to +60°C




marantec []

Compatibility

Comfort 200 series, Comfort 300 series, Comfort 515, 516, 525, 530L and Comfort 861, 861 S. With the control housings of the X.52 and X.82, installation is possible only with the maveo adapter set.

For the maveo connect stick's **full range of safety and functionality**, a **Photocell**, such as the **Special 630** with the installation bracket set, is a must.

For full installation of the maveo connect stick, **location services**, **Bluetooth**, **mobile data** and a **WLAN** must be operational and approved for the **maveo app**.

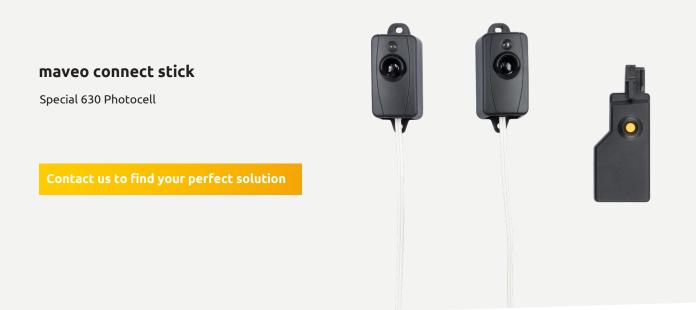

How to order

Simply send us a request by e-mail or phone to: sales@marantec.co.uk +44 (0)1928 579 050

> We'll be happy to assist you. sales@marantec.co.uk

¹ For the revolving and sliding gate, the maveo adapter set is required.
² Full functionality requires a photocell. Not compatible with other MS bus modules from Marantec. ³ This function is only available when an interim position is programmed into the drive.